
THIS DRAWING IS INTENDED ONLY AS A GUIDE AND NOT AS A REPLACEMENT FOR PROFESSIONALLY ENGINEERED PROJECT DRAWINGS. THIS CONCEPT SYSTEM DRAWING DOES NOT IMPLY COMPLIANCE WITH LOCAL BUILDING CODES, ACTUAL INSTALLATION MAY VARY DEPENDING ON INSTALLATION LOCATION AND PRARMETERS AND IT MUSTS BE DONE IN ACCORDANCE TO ALL LOCAL BUILDING CODES. VERRIFY WITH LOCAL BUILDINGS OFFICIALS BEFORE COMMENCEMENT OF SYSTEM INSTALLATION. CHANGES OR MODIFICATIONS TO PIPING OF DESIGN IS NOT TO BE PERFORMED WITHOUT EXPRESSED WRITTEN PROSISSION BY AMAIEN, INC.

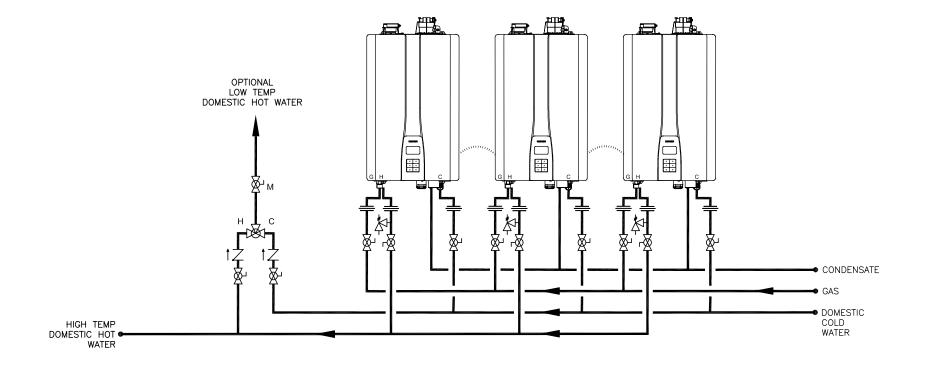

TANKLESS QUANTITY: RECOMMENDED PIPE SIZE	1 UNIT: 3/4" 2 UNITS: 1" 3 UNITS: 1-1/4" 4-5 UNITS: 1-1/2" 6-8 UNITS: 2" 9-14 UNITS: 2-1/2" 15-16 UNITS: 3"			SYMBOL LEGEND			
Mavien	NPE-S2 SERIES TANKLESS WATER HEATER			UNION CONTROL WIRING	' '	FULL-PORT VALVE	MIXING
	(3) NPE-S2 TANKLESS WATER HEATERS HIGH TEMP		PON VALVE			VAL.	
20 GOODYEAR	WITH THERMOSTATIC MIXING VALVE FOR LOW TEMP FIXTURES INCLUDES MODELS 150, 180, 210 AND 240				PRESSURE RELIEF VALVE	CASCADE CABLE	
IRVINE, CA 92618 800-519-8794					,		
www.navieninc.com	DRAWN BY: S. STOEKE	NPE-S2-3-MV	MAY 5, 2022				