
THIS DRAWING IS INTENDED ONLY AS A GUIDE AND NOT AS A REPLACEMENT FOR PROFESSIONALLY ENGINEERED PROJECT DRAWINGS. THIS CONCEPT SYSTEM DRAWING DOES NOT IMPLY COMPLIANCE WITH LOCAL BUILDING CODES, ACTUAL INSTALLATION MAY VARY DEPENDING ON INSTALLATION LOCATION AND PARAMETERS AND IT MUSTS BE DONE IN ACCORDANCE TO ALL LOCAL BUILDING CODES, VERIFY WITH LOCAL BUILDINGS OFFICIALS BEFORE COMMENCEMENT OF SYSTEM INSTALLATION. CHANGES OR MODIFICATIONS TO PRINT OR DESCRIPTION OF DESCRIPTION OF

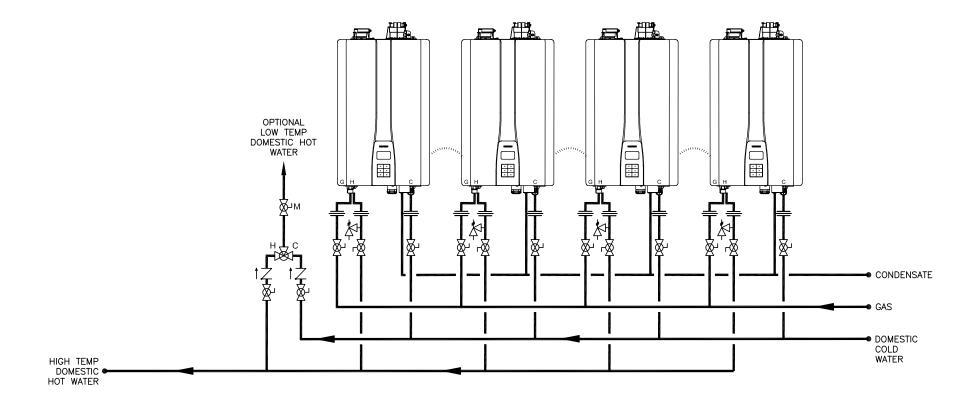

TANKLESS QUANTITY: RECOMMENDED PIPE SIZE	1 UNIT: 3/4" 2 UNITS: 1" 3 UNITS: 1-1/4" 4-5 UNITS: 1-1/2" 6-8 UNITS: 2" 9-14 UNITS: 2-1/2" 15-16 UNITS: 3"				SYMBOL LEGEND			
	NPE-S2 SERIES TANKLESS WATER HEATER			UNION CASCADE CABLE	CHECK VALVE	FULL-PORT VALVE	MIXING VALVE	
MNAVIEN	(4) NPE-S2 TANKLESS WATER HEATERS HIGH TEMP WITH THERMOSTATIC MIXING VALVE FOR LOW TEMP FIXTURES INCLUDES MODELS 150, 180, 210 AND 240				1	VALVE	VALVE	
20 GOODYEAR					PRESSURE RELIEF VALVE			
IRVINE, CA 92618 800-519-8794								
www.navieninc.com	DRAWN BY: S. STOEKE	NPE-S2-4-MV	MAY 11, 2022					