



NFB-H High-Efficiency Condensing Fire Tube Boiler

Submittal Sheet

- Model NFB-175H (175,000 BTU/H)
- Model NFB-200H (199,900 BTU/H)

Job Name: _____
 Location: _____
 Engineer: _____
 Wholesaler: _____
 Sales Rep: _____
 Contractor: _____
 Model: _____ Gas Type (NG/LP): _____ Input (BTU/H): _____ Output (BTU/H): _____
 Notes: _____

Boiler Standard Features

- Stainless Steel Heat Exchanger, ASME "H", with Non-Metallic Condensate Collector Base
- Cold-rolled Carbon Steel Casing
- 95% AFUE
- Fully Modulating Burner with 13:1 Turndown Ratio
- Low NOx (<20ppm)
- 80 PSI ASME Max Pressure
- 30 PSI ASME Relief Valve
- Direct Spark Ignition
- Variable Speed Blower
- Dual Venturi Mixing System
- Negative Pressure Gas Valve
- Cascading Up to 16 Units
- Wall Mounting Bracket
- LP Gas Conversion Kit
- Outdoor Temperature Sensor
- Universal Temperature Sensor
- Condensate Trap
- Air Vent

Venting

- Vertical and Horizontal Direct Venting 2" up to 65', 3" up to 150'
- 2 in. or 3 in. PVC, CPVC, PP, SS Vent Materials
- Common Venting Up to 8 Units
- Vent Termination Caps
- Wall Flanges

Boiler Optional Accessories


- Primary/Secondary Boiler Manifold System
- Condensate Neutralizer Kit
- NaviClean™ Filter
- Zone Controllers
- Universal Temperature Sensor
- NaviLink™ Wi-Fi Control
- Ready-Link® Boiler Stand and Racking System
- 50 PSI Pressure Relief Valve
- 80 PSI Pressure Relief Valve
- Backdraft Damper Kit

Controls

- LCD Display with Select Buttons and Command Dial
- LWCO with Manual Reset
- High and Low Gas Pressure Switches with Manual Reset
- Manual Reset High Limit
- Freeze Protection
- Outdoor Reset
- Warm Weather Shutdown
- Air Handler Interface
- 4 Circulator Outputs
- 3 Zone Valves or 3 Zone Pumps Powered Terminals
- Remote Access via NaviLink™ Mobile Application

Warranties


- 15 yrs. Residential and 10 yrs. Commercial Heat Exch. Warranty
- 5 yrs. Residential and 3 yrs. Commercial Parts Warranty
- 1 yr. Labor Warranty

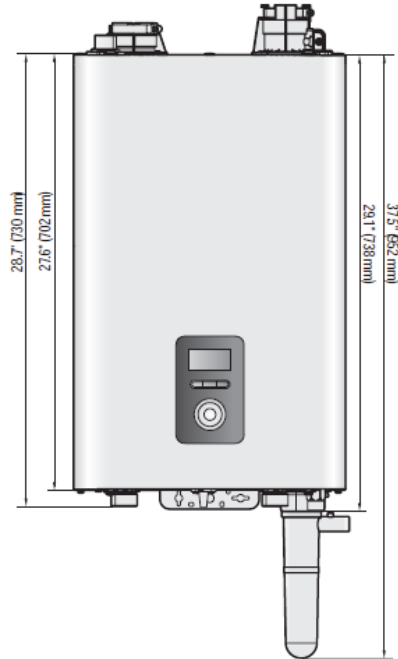


Supply Connections


	Description	Diameter
A	Air Intake	2 in
B	Exhaust Gas Vent	2 in
C	Air Vent Connection	3/4 in
D	Heating Supply	1 1/4 in
E	Heating Return	1 1/4 in
F	Gas Connection	3/4 in
G	Condensate Outlet	1/2 in

Overhead View

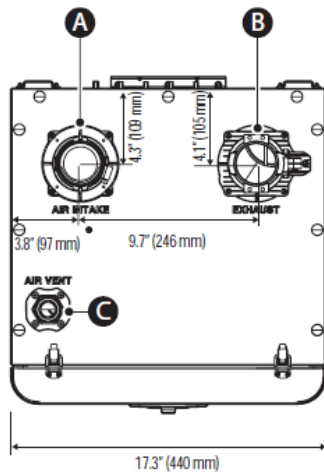

Supply Connections

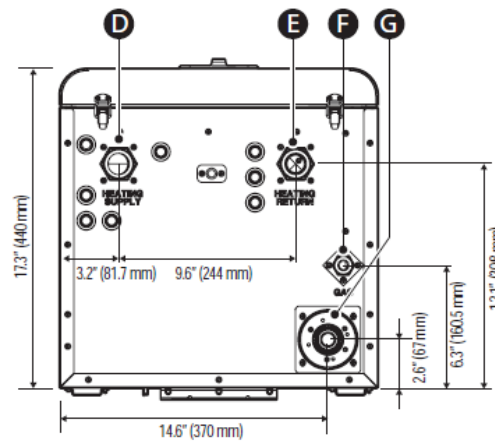

Navien Condensing Boiler Space Heating Ratings						Other Specifications		
Model Number	Heating Input (BTU/H)		Heating Capacity (BTU/H)	Net AHRI Rating Water (BTU/H)	AFUE (%)	Water Pressure	Water Connection Size (Supply, Return)	Water Volume
	Min	Max						
NFB-175H	13,300	175,000	160,000	139,000	95	6 - 80 psi	1-1/4" NPT	4.5 gallons
NFB-200H	13,300	199,900	182,000	158,000	95			