



QuickFacts

NFC-H Series Condensing Fire Tube Combi-boilers

Ratings & Specifications

	Model	
	NFC-250/175H	NFC-250/200H
	Product Approvals	
CSA	Yes	Yes
SCAQMD 1146.2 (NOx, <20 ppm)	Yes	Yes
Low lead (<0.25%, DHW only)	Yes	Yes
ASME	Yes "H" stamp	Yes "H" stamp
AHRI Number	206368824	206368825
Energy Star	Yes	Yes
	Space Heating Ratings	
AFUE, %	95.0	95.0
Heating Capacity, BTU/H	161,000	183,000


Applications

Air Handler	Closed Loop Hydronic Heating Systems
For NFC technical drawings of specific installations and requirements please visit Navieninc.com	

Product Features

- PATENTED STAINLESS STEEL HX FOR HEATING**
- SEPARATE HIGHER FLOW DHW HX**
- ADVANCED USER INTERFACE**
- TDR UP TO 15:1 HTG UP TO 150 FEET**
- NG OR LP FIELD GAS CONVERTIBLE**
- 3 ZONES VALVES or PUMPS**
- 2" VENT UP TO 65 FEET & 3" VENT UP TO 150 FEET**
- 1/2" GAS CAPABILITY UP TO 24 FT**
- AFUE 95.0%**

NFC-H: The Inside Story

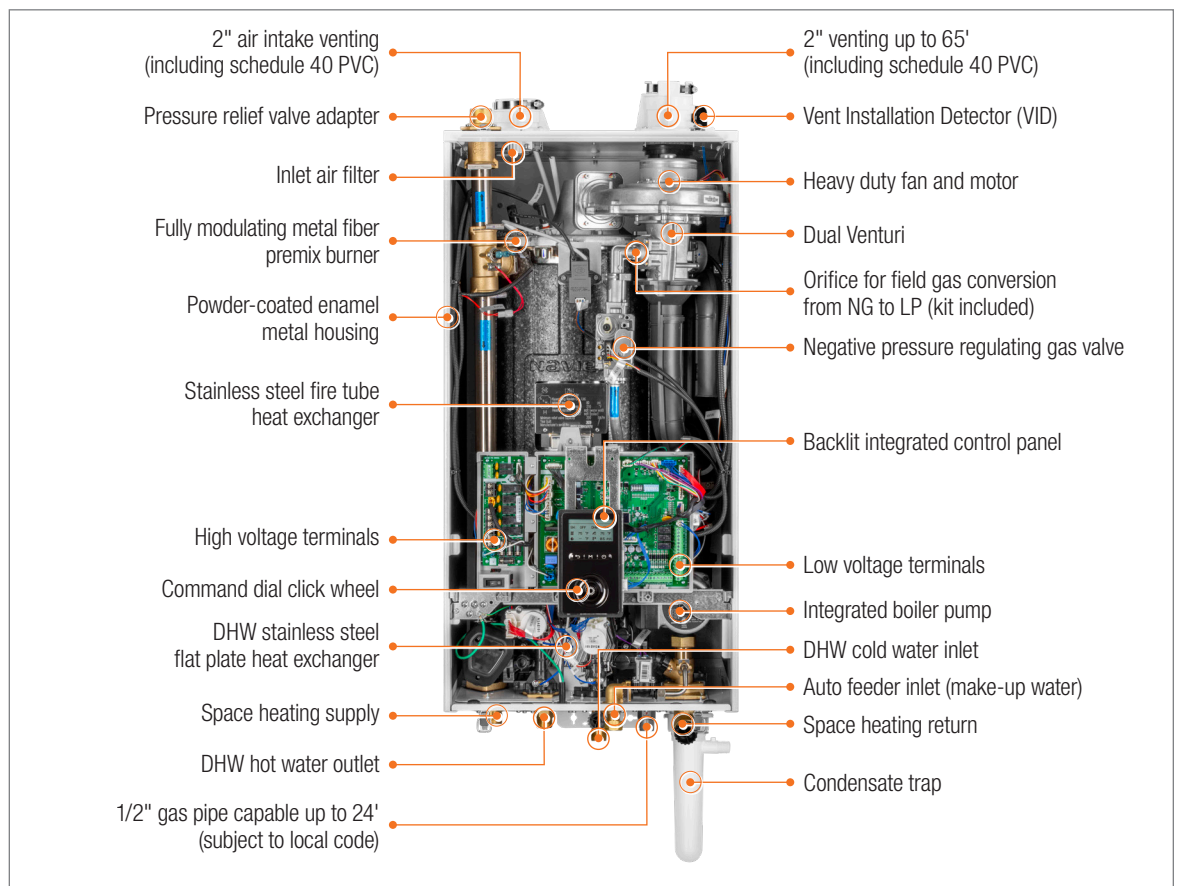

Heating Input Ranges

Model	Heating (BTU/H)	DHW (BTU/H)
NFC-250/175H	13,300-175,000	13,300-210,000
NFC-250/200H	13,300-199,900	13,300-210,000

Temperature Range Settings

Item	Temperature Range °F (°C)	Remarks
Space heating	Supply 77-185 (25-85)	Actual supply and return temperatures vary depending on the selected outdoor reset curve.
	Return 68-158 (20-70)	
DHW	86-140 (30-60)	

Warranty

Type	Residential*	Commercial
Heat exchanger	10 years	5 years
Parts*	5 years	3 years
Labor	1 year	1 year

*Applies to single family residential locations.
For complete details please refer to the full warranty at Navieninc.com.

